

LTO-7: Hits New Milestones for Performance, Capacity, and Data Reliability

NOTICE

This Technology Brief contains information protected by copyright. Information in this Technology Brief is subject to change without notice and does not represent a commitment on the part of Quantum. Quantum assumes no liability for any inaccuracies that may be contained in this Technology Brief. Quantum makes no commitment to update or keep current this information in this document, and reserves the right to make changes to or discontinue this document and/or products without notice. No part of this document may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying, recording, or information storage and retrieval systems, for any purpose other than the purchaser's personal use, without the express written permission of Quantum.

TABLE OF CONTENTS

Introduction3

Comparing the LTO-6 and the LTO-7 Specifications3

What are the technology improvements and changes that provided these results?3

LTO-7 Full-Height vs. LTO-7 Half-Height6

Summary8

INTRODUCTION

In this Technical Brief there is a detailed description of technology improvements made to the LTO-7 tape drive and media which result in increased capacity, performance, and reliability. The LTO-7 drive is available in two versions: the Full-Height and Half-Height drive form factor. The second section of this document will compare the versions of the drives to help customers understand which is best for their environment and use case.

The LTO tape format has become the market-dominating standard for magnetic recording tape drives and media over the past years. The technology has progressed from LTO-1 (2000) and most recently has delivered the latest generation with the release of LTO-7 (2015).

COMPARING THE LTO-6 AND THE LTO-7 SPECIFICATIONS

- Capacity: 140% increase
- Performance: 90% increase
- Tape drive durability improvements
- Media reliability improvements, this being particularly valuable with increasing demands for long-term retention: 100x increase in data reliability due to improved BER and advanced BaFe media

Feature	LTO-5	LTO-6	LTO-7
Native capacity	1.5TB	2.5TB	6TB
Compressed capacity	3.0TB	6.25TB	15TB
Native performance	140MB/sec 500GB/hour	160MB/sec 576GB/hour	300MB/sec 1.08TB/hour
Compressed performance	280MB/sec 1TB/hour	400MB/sec 1.4TB/hour	750MB/sec 2.7TB/hour
Hard Bit Error Rate	1 in 10 ¹⁷	1 in 10 ¹⁷	1 in 10 ¹⁹
Read/Write Back to	LTO-3/LTO-4	LTO-4/LTO-5	LTO-5/LTO-6

WHAT ARE THE TECHNOLOGY IMPROVEMENTS AND CHANGES THAT PROVIDED THESE RESULTS?

Capacity: LTO-7 capacity increased with the final transition to using BaFe (Barium Ferrite) media. Some manufacturers started this transition with LTO-6 adopting the new media formulation, and with the release of LTO-7 this change is complete for all LTO consortium partners. The BaFe media composition has smaller magnetic particles, which allow increased recording bit density, resulting in higher capacity. A new servo format was adopted to reduce signal noise, improve positional sensitivity, and implement a higher bandwidth servo—which were enablers for higher capacity, higher transfer rates, and improved data durability. Another key differentiator for LTO-7 is the Aggregated Rewrite format to achieve smaller-capacity overhead; therefore, higher-efficiency tape areal utilization. This is accomplished by compressing all unwritten user data sections due to media errors and rewriting them at the end of each data set, resulting in lower-capacity overhead: 3% with LTO-7 vs. 5% with LTO-6.

Performance: LTO-7 tape drives have increased the data buffer to 1GB from the 512MB buffer used in prior generations. The increased buffer size will help the tape drive continue to write data in the “streaming” even when ingest data rates are not consistent. Another major change for LTO-7 that impacts performance is a new recording head design that uses 32 R/W channels up from the 16 R/W channel head used in prior LTO formats. It is the combination of the new head design and the increased data density using the BaFe media that delivers the increased performance for LTO-7. With LTO-7 the media is moving at a slower rate (LTO-7 @ 5.01meter/sec vs. LTO-6 @ 6.83meter/sec) compared to prior generations, while still increasing maximum data performance. Slower tape speed is an enabler for future generations of LTO drives to offer higher data rates while still using 32 data channels.

Data Integrity: LTO-7 has a new ECC data format, which resulted in higher data durability compared to LTO-6 when used with new and improved BaFe media and the new high-performance servo system. LTO ECC format is based on a two-dimensional interleaved dual error-correction code, where inner code is operated in error detection and correction mode where the outer code is in erasure mode. LTO's unique two-dimensional interleaving algorithm randomizes media defects and burst errors. This randomization enables ECC to work efficiently, resulting in extremely low BER numbers. With LTO-7, the channel number has been increased to 32 from 16, and inner ECC has been modified to include header metadata along with the user data such that both are now protected by a stronger ECC format. LTO-7 format is 249,237,13 where LTO-6 format is 240,230,11. LTO-7 codeword is 9 bytes longer with two bytes more parity. This new architecture is the key to achieving even lower BER numbers compared to LTO-6. It is this change that made it possible for the BER (Bit Error Rate) detection specification for LTO-7 to be increased to no more than a single bit error for every 1×10^{19} of bits transferred. This data integrity checking is 100x better than LTO-6 and is considered to be "enterprise-class" data integrity checking.

The LTO-7 BER (Bit Error Rate) specification is based on a calculation of uncorrectable C2 ECC events assuming all errors are random and uncorrelated. This is a theoretical analysis, since experimentation-based estimates will require approximately 130 years at a 300MB/s data rate to encounter an error event. These theoretical calculations are based on an LTO-7, 32-channel multi-dimensional deep interleaving format architecture and the new ECC format with advanced BaFe media assuming that all byte errors are random and uncorrelated. This assumption has been experimentally verified^[1]. More complex reliability models, which are based on the theory of renewal processes, can account for correlated errors and defective header and synchronization fields^[2]. Therefore, the theoretical analysis of the error correction scheme implemented in LTO-7 leads to an uncorrectable error rate over the lifetime of the drive of one error per $1E19$ bits read.

Tape Drive and Media Durability: The LTO-7 tape drive has also undergone significant changes in the generation. The tape path guide rollers are all now a flangeless design. What this provides is a smoother tape path that is less likely to cause any damage to the tape edge. This design has also proven to be less likely to incur media debris buildup, which will reduce cleaning and service requirements. Figure 1 below shows the LTO-7 Linear Actuators system with tape guiding and a magnetic head with read and write elements resulting in a read-while-write process.

[1] S. Furrer, M. A. Lantz, J. B. C. Engelen, A. Pantazi, H. E. Rothuizen, R. D. Cideciyan, G. Cherubini, W. Haeberle, J. Jelitto, E. Eleftheriou, M. Oyanagi, Y. Kurihashi, T. Ishioroshi, T. Kaneko, H. Suzuki, T. Harasawa, O. Shimizu, H. Ohtsu, and H. Noguchi, "85.9 Gb/in² Recording Areal Density on Barium Ferrite Tape," *IEEE Trans. on Magnetics*, vol. 51, no. 4, April 2015.

[2] S. S. Arslan, J. Lee, J. Hodges, J. Peng, H. Le, and T. Goker, "MDS Product Code Performance Estimations Under Header CRC Check Failures and Missing Syncs," *IEEE Trans. on Device and Materials Reliability*, vol. 14, no. 3, Sept. 2014.

Servo Format Changes: LTO-7 has a new servo format very similar to the one that is used in enterprise-class tape drives. It is still the same timing-based servo format as in LTO-6 and prior generations. However, there are three key changes that result in improved tracking performance and data reliability. Servo format is more compact, with increased sensitivity and lower noise because of its new geometric compactness by increasing azimuth angle and shortening overall dimensions where both allow higher tracking bandwidths. Also, data band detection is now embedded as encoded data words into the servo format information, which makes the band ID detection stronger due to servo format ECC.


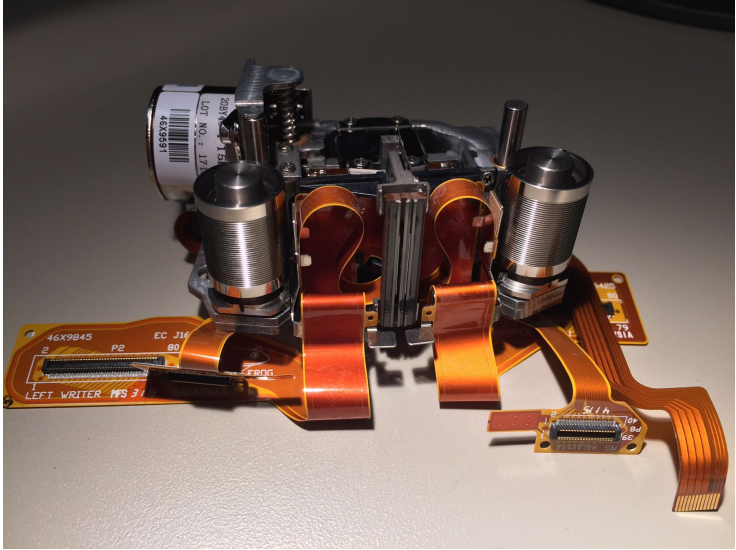


Figure 1 - Special grooved rollers without flanges integrated with the multi-stage linear actuator for optimum tracking performance without touching tape edges.

Long-Term Data Retention: The change to BaFe media will enable customers to reliably retain data for longer periods of time compared to prior media generations. This point is particularly valuable as the role for tape is becoming more about storing data for long-term uses cases such as data archiving, where media might not be accessed for a number of years.

The following chart shows how much data a single cartridge will be able to reliably store over its planned lifespan. It is easy to see how all of these technology advancements provide nearly 3x the cartridge life expectancy compared to previous LTO generations.

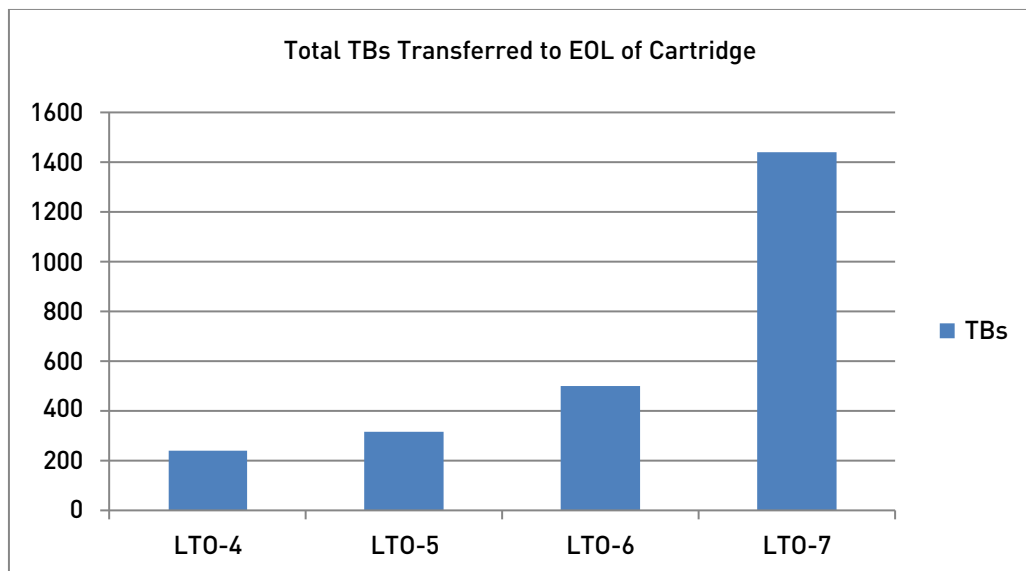

LTO-7 FULL-HEIGHT VS. LTO-7 HALF-HEIGHT

LTO-7 is available in both an FH (full-height) and an HH (half-height) drive format. What are the differences and why would you choose one over the other?

A vast majority of the technology and improvements that have been implemented are shared between both the LTO-7 FH and the LTO-7 HH tape drives. There is a small number of differences, mostly due to the FH drive having more real estate for the circuitry and mechanical assemblies. The following chart shows how the two drives are alike as well as where they differ.

Technical Feature	LTO-7 FH	LTO-7 HH
MTBF of 250,000 power-on hours at 100% duty cycle	Yes	Yes
MSBF: 100,000 cartridge load/unload cycles	Yes	Yes
Read after write data integrity verification	Yes	Yes
Integrated head cleaner	Yes	Yes
Library Drive Interface (LDI)	Yes	Yes
Microcode updateable	Yes	Yes
Speed matching	Yes	Yes
Encryption capable	Yes	Yes
Automation Drive Interface (ADI) support	Yes	Yes
Graceful dynamic brake function at power loss	Yes	Yes
LTFS capable	Yes	Yes
8Gb FC interface	Yes	Yes
Serial Attached SCSI (SAS) at 6Gb/sec interface	No	Yes
Cartridge auto-eject on over temperature	Yes	Yes
Single Character Display (SCD) and Single LED panel	Yes	Yes
Encryption LED	No	Yes
Customer-centric statistical analysis reporting system	Yes	Yes
Improved pin pick and threader mechanics to return leader pin to cartridge	Yes	Yes
New high-bandwidth dual-stage actuator	Yes	Yes
RoHS compliance	Yes	Yes
32-channel implementation to support Ultrium Generation 7 Media	Yes	Yes

Besides having the same capacity and performance, a majority of the features delivered in LTO-7 are the same when comparing the FH and HH tape drives. When examining the drives at the next level of detail, there are differences that are not as obvious.

Technical Feature	LTO-7 FH	LTO-7 HH
Tape speed – maximum during locate/search	10meter/sec	9meter/sec
Tape speed – maximum during rewind	10meter/sec	9meter/sec
Acceleration	10meter/sec	5meter/sec
Reposition (Backhitch)	3.6sec	5.2sec
Average time to record from load point	56sec	60sec
Average rewind time	59sec	62sec
Cartridge insertion force – required	1530gm	1000gm
Cartridge insertion force – maximum allowed	3060gm	1500gm
Shock during operation	30G	10G
Vibration during operation	.67G	.30G

FH Drives Have Larger Motors: A simple start to understanding these differences is size. The FH drive has significantly more space to allow the use of larger and more robust mechanical assemblies, increased airflow for cooling electronics, as well as the use of larger motors that move the tape during writing, reading, and tape positioning.

The use of the larger motors in the FH drive actually provides a number of advantages over the HH version of LTO-7. The next section will explain how the use of larger motors impacts a number of LTO tape drive characteristics.

FH Drives Provide Increased Mechanical Reliability: The use of larger motors in this part of the LTO drive operation is relatively simple mechanics. Even though both the FH and the HH drives have the same reliability ratings, by using larger motors to move the recording media the larger motors are operating at a much lower percentage of the designed maximum performance. Ultimately this will increase the overall mechanical reliability of the tape drive.


FH Drives Move Media Faster: The FH LTO-7 drive moves media faster than the HH drive; and in use cases where files are being accessed randomly from various locations on the cartridge, this can have a significant impact on overall sustained data performance rates. For customers using the LTFS features of LTO, this might be particularly true in that files are stored as they are written and there is no way to predict which files are going to be accessed prior to the actual read request being received.

FH Drives Support Faster Media Acceleration: The second advantage of using the larger motors in the FH drive is media acceleration. Acceleration comes into play when data transfer rates are not sufficient to maintain reading/writing in “streaming mode”. If a host is not sending data fast enough, or is not acknowledging the receipt of data soon enough, the drive will slow down through the LTO drive native speed matching capability; but if the data rates fall below a certain threshold, the drive will eventually stop moving tape. During a write operation, the drive will attempt to perform speed matching to a minimum of 100MB/sec; and if the data stream drops below this threshold, the tape motion is stopped. When the data stream resumes, the tape drive will move the media backwards a short distance, come back up to speed, and then resume writing. This process is also known as “back hitching,” and with the faster acceleration of the FH drive for environments where this occurs regularly, the FH drive will clearly have advantages over the HH drive.

FH Drives Are More Immune to Shock and Vibration: The base plate in the FH LTO-7 is made of aluminum compared to a composite base plate used in the HH drive. The metal base plate provides significantly more immunity to shock and vibration that can cause problems if these factors exceeded.

Cartridge Insertion Force: With a vast majority of LTO drives and media being installed in automation or a library, it is important to make sure the robotic mechanism is handling media properly into and out of the tape drive. Even though a majority of the libraries in use today are being designed to handle media within these specifications, it is recommended to have the most durable and robust mechanism available. Both FH and HH LTO drive specifications are stated at 100,000 load/unload cycles, but the FH drive has demonstrated that it can handle many more cycles than this stated specification.

Thermal Protection: Temperature is one the worst enemies of magnetic media. Both the FH and HH drives will automatically protect media from being subjected to over-temperature conditions. As shown on the chart below, the FH drive has a much lower operating temperature, even when operating at full performance.

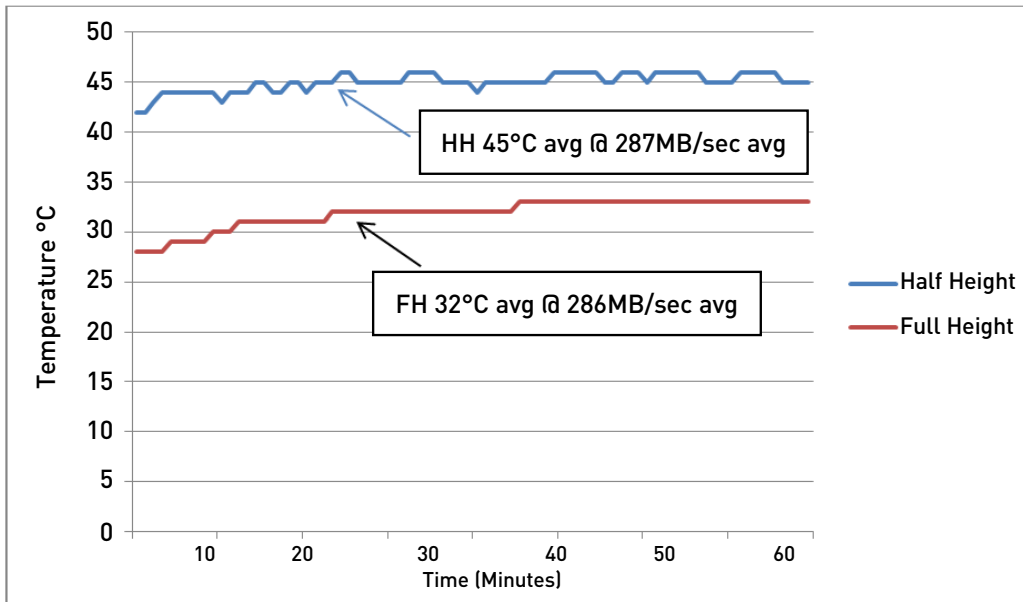

SUMMARY

LTO-7 sets new milestones for performance, capacity, and reliability with the release of the LTO-7 tape drive. Media durability has been increased to offer customers a more reliable long-term storage technology.

While both the FH and HH versions of the tape drive have many common characteristics, there are a number of differences that clearly make the FH drive the better choice for high-duty cycle environments, as well as use cases where the drives will be accessing files that are stored in multiple locations on the same cartridge, and also where the drives will be required to load/unload many cartridges during normal use. This factor is particularly true for archive use cases as well as where the LTO LTFS (Linear Tape File System) is being used.

ABOUT QUANTUM

Quantum is a leading expert in scale-out storage, archive and data protection, providing solutions for capturing, sharing and preserving digital assets over the entire data lifecycle. From small businesses to major enterprises, more than 100,000 customers have trusted Quantum to address their most demanding data workflow challenges. Quantum's end-to-end, tiered storage foundation enables customers to maximize the value of their data by making it accessible whenever and wherever needed, retaining it indefinitely and reducing total cost and complexity. See how at www.quantum.com/customerstories.

©2016 Quantum Corporation. All rights reserved. Quantum and the Quantum logo are registered trademarks of Quantum Corporation and its affiliates in the United States and/or other countries. Linear Tape-Open, LTO, the LTO Logo, Ultrium and the Ultrium Logo are registered trademarks of Hewlett Packard Enterprise, IBM and Quantum in the USA and other countries. All other trademarks are the property of their respective owners.